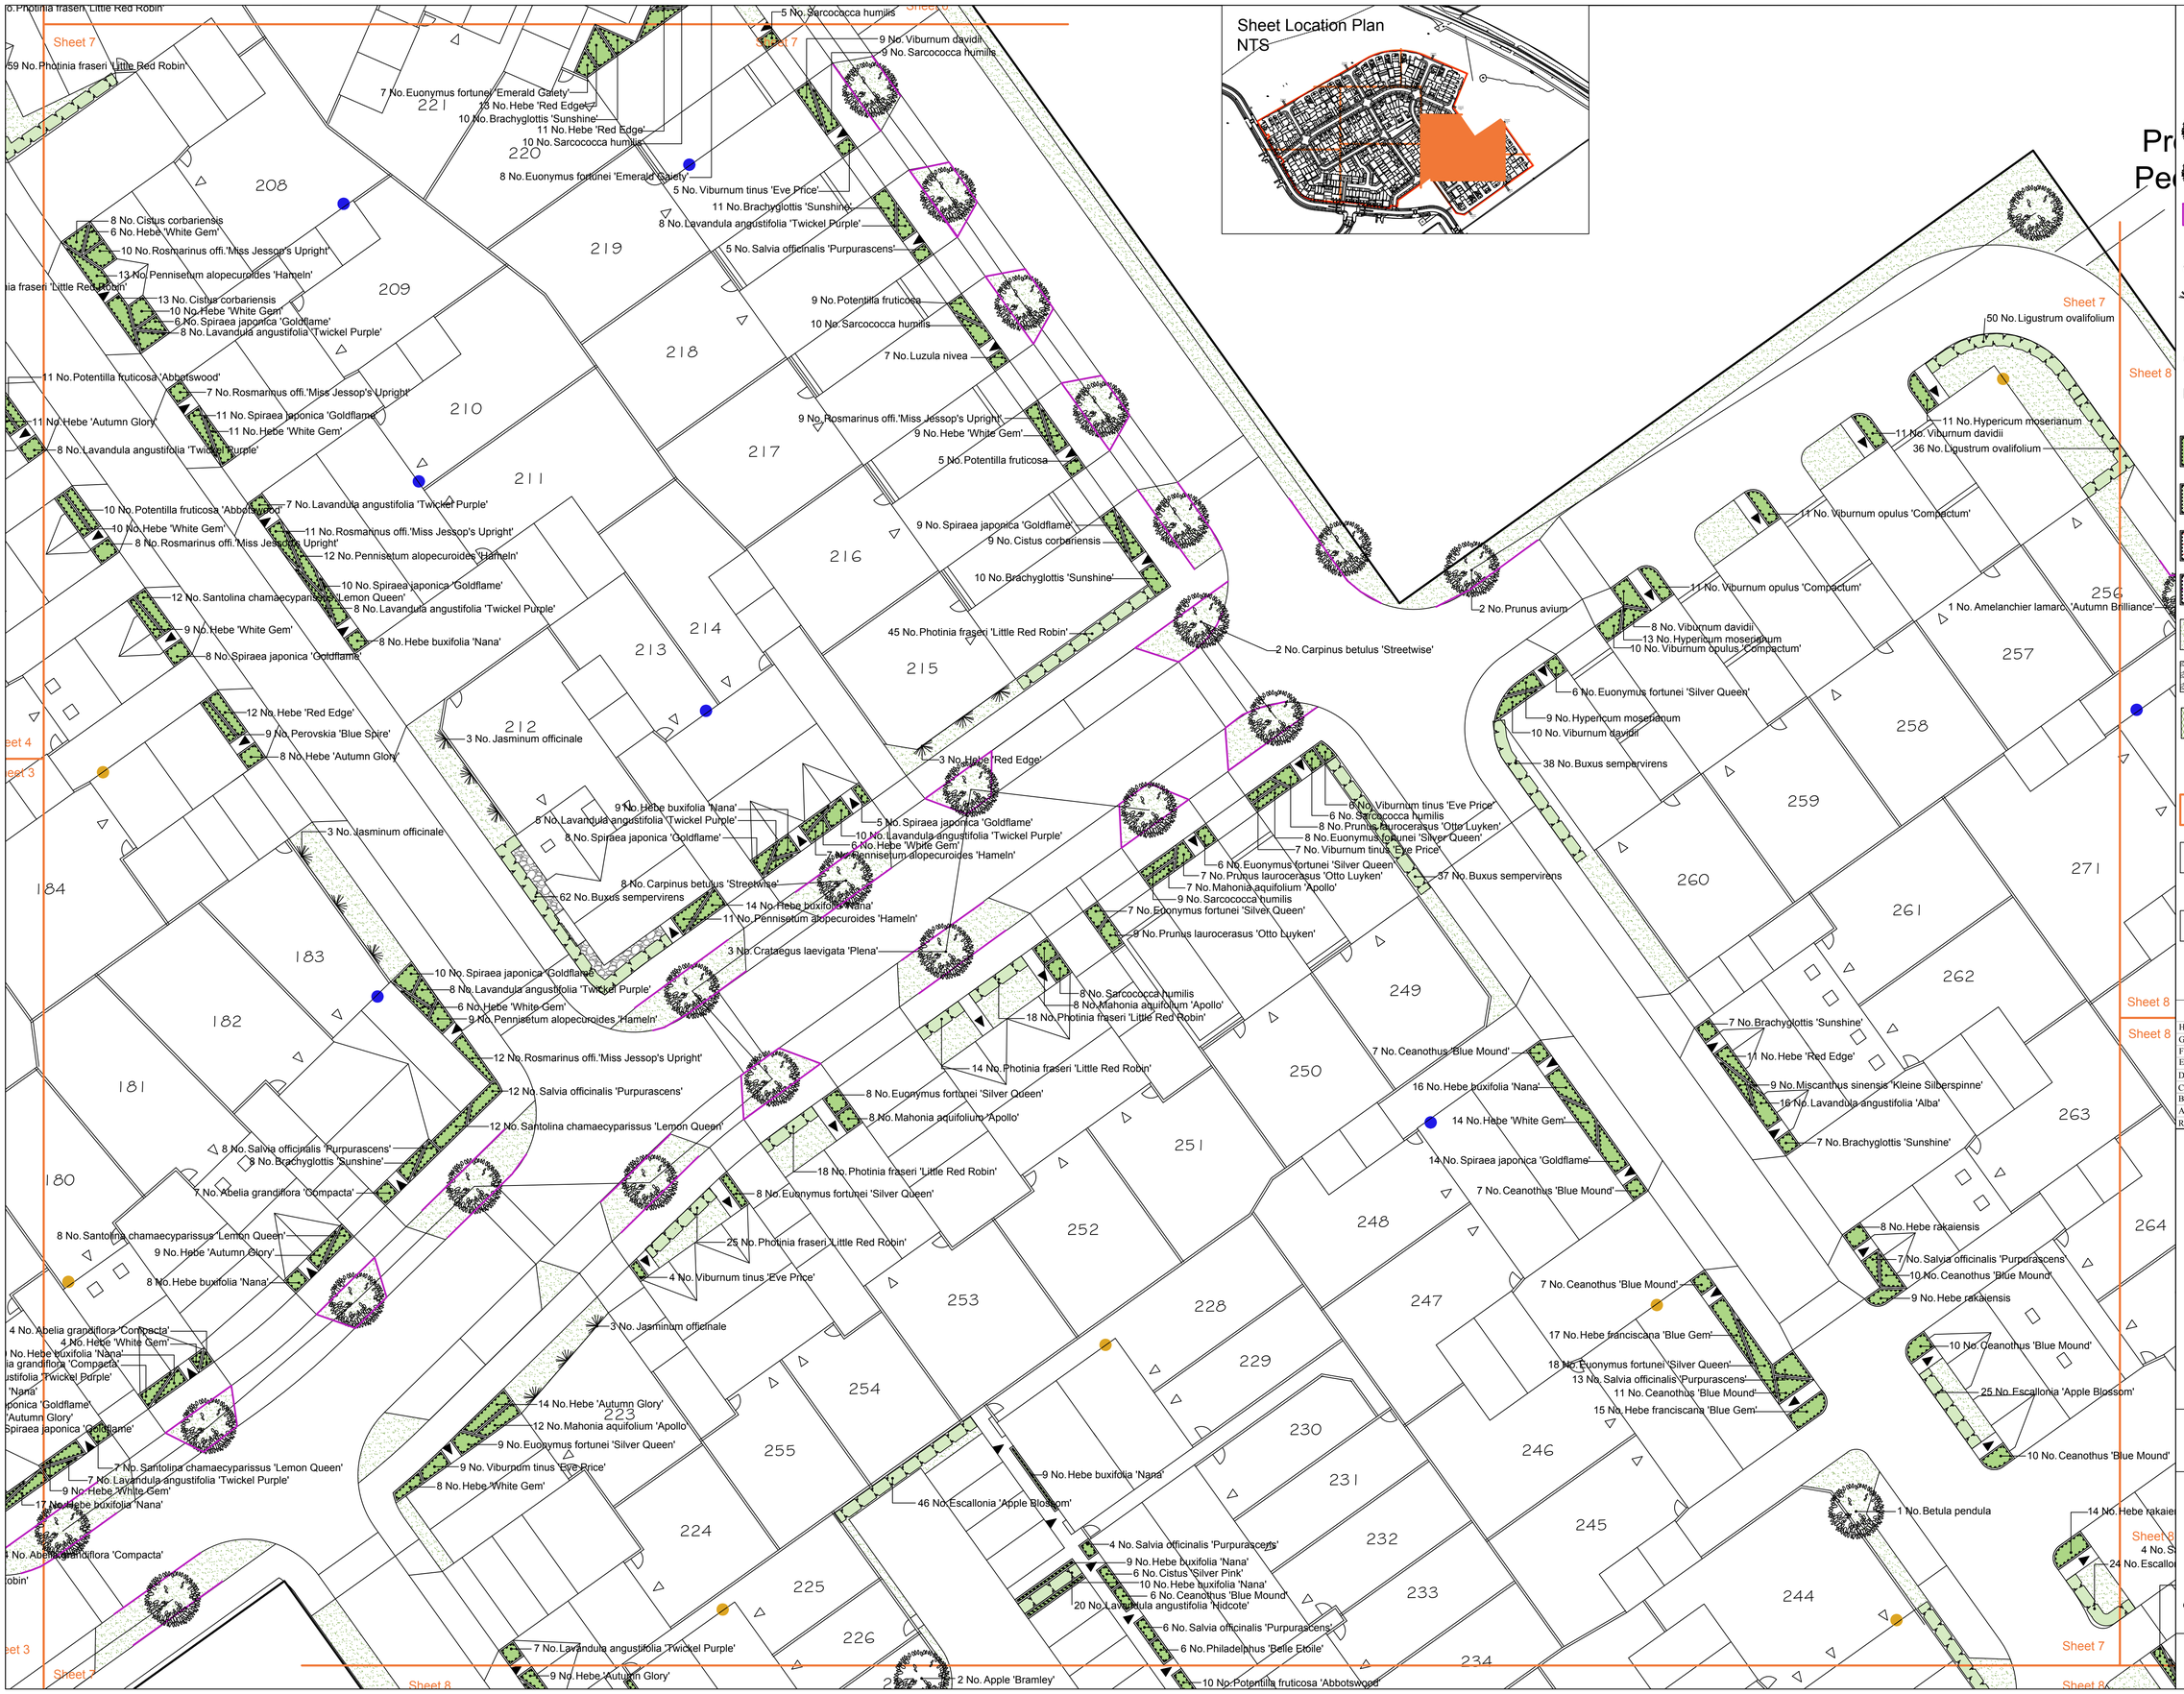

Sheet Location Plan
NTS

SPECIFICATION
All works generally, to comply with the written Soft Landscape Specification.

NOTE: DO NOT SCALE FROM DRAWING

Legend

- Proposed tree planting within soft landscape. See detail on sheet 1,2 and 5 of 8
- Proposed tree planting within hard landscape. See detail on sheet 6 of 8
- Proposed root barrier to be ReRoot 600 as supplied by GreenBlue Urban or similar
- Proposed specimen shrub planting to receive 75mm bark mulch after planting operations
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a single row at 300mm centres
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed decorative mix shrub planting to be planted in groups of 5-7no. of each species and as above
- Proposed bulb areas to be planted in Autumn at three times the depth of the bulb
- Proposed marginal planting to be planted in groups of 3-5
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Proposed areas to receive 75mm deep gravel to be locally sourced and laid on a weed proof membrane
- Proposed grassland areas, to be seeded with EG8 Meadow Mixture for Wetlands grass seed mix as supplied by Emorsgate and sown at 5 grams per msq, or similar. Please refer to drawing no. 667549-SK-SBU-C-1003 to view cross section of the French Drain
- Cut lines
- Approximate position of swift box, to be Swift Box Type 16, available from Schwegler-natur.de, or similar to be located at height under the eaves of the building
- Approximate position of sparrow terrace, to be 1SP, available from Schwegler-natur.de, or similar

Refer to Sheet 5 of 8 for plant schedule

Refer to Sheets 2, 5 and 6 of 8 for LAP Legend

Rev	Date	Details	Drawn
H	12.01.17	Client comments	AD
G	11.01.17	LPA comments	AD
F	06.01.17	Layout changes and LPA comments	AD
E	06.01.17	Layout changes and LPA comments	AD
D	07.12.16	Layout changes and LPA comments	AD
C	01.11.16	Layout changes	AD
B	25.10.16	Layout changes	LS
A	05.10.16	Layout changes	AD

ACD ENVIRONMENTAL
Ecology
Archaeology
Arboriculture
Landscape Architecture

ACD at these offices:
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, SN16 0ES
Tel: 01666 825646

Courtyard House, Mill Lane, Godalming, GU7 1EY
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close, Eastleigh, SO50 9SX
Tel: 02382 026 300
email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Linden HOMES

scheme: Parcel H12, Northstowe
client: Linden Homes
drawing: Landscape Proposals
date: Sept 2016
scale: 1:200@A1
drawing no: LIN20825 11 Sheet 7 of 8
drawn: AD checked: JS

Copyright of ACD Environmental Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2011. Copyright of this plan remains with ACD until all fees have been paid in full.